

# **OGP RANGE**Outdoor Call Help Point Tower

## OGP SERIES OUTDOOR HELP POINT TOWER

• OGP-10 - 9' Free Standing Tower

## **FEATURES and BENEFITS**

- 316 stainless steel base is designed to breathe out condensation to prevent internal moisture build up within the pole.
- Integrate DIN mounting system to allow for 3rd party equipment (ie: media converters, switches ... ).
- Removable sealed service panels (with security screws) to access internal systems.
- Large radius rounded corners for impact safety.
- Panel area has overhead LED illumination.
- Panels are reverse mounted to eliminate exposed screws.
- Large bright beacon 360° viewable. Operational modes are user selectable.
- High impact beacon lens, UV protected for long life.
- Supports optional overhead camera mount.
- Dual coating; Safety Yellow exterior UV protected, with corrosion resistant primer.
- Large visible signage on 2 sides. Content user definable.
- Panel area supports Guardian's HDE Series of Analog and VoIP Help Point hands-free devices.
  - HDE SERIES ANALOG HEAVY DUTY EMERGENCY & PUBLIC ACCESS TELEPHONES
  - HDE-11/11 Recessed/Single Emergency/ 0.25 Watt / 3.0 Watt\*\*
  - HDE-1100 Recessed/Single Call Button & 12 Digit Keypad/ 0.25 Watt / 3.0
     Watt\*\*
  - HDE-V SERIES VoIP HEAVY DUTY EMERGENCY & PUBLIC ACCESS TELEPHONES
  - HDE-11-V Recessed/Single Emergency/ 0.5 Watt.
  - HDE-1100-V Recessed/Single Call Button & 12 Digit Keypad.

## OGP RANGE OF HELP POINT DEVICES

Guardian's OGP (On-Guard Protector) RANGE of Heavy Duty Emergency Industrial Help Point Telecommication Devices and Towers, combined with Guardian's HDE Series of Analog and VoIP Help Point hands-free devices are intended for use in public areas where direct / emergency assistance or hands-free communication is required.

## HDE SERIES OF TELEPHONES

Guardian's HD SERIES Heavy Duty Emergency Industrial Telephones the Guardian HDE SERIES (Analog) and HDE-V SERIES (VoIP) telephones provide a two-way link to emergency, access or information assistance through full-duplex phone transmission. A call may be initiated from the phone by pushing the button which routes the call to its assigned extension. These phones also provide the capability of monitoring the status of each unit from a remote location, informing personnel of a malfunction.

## **APPLICATIONS**

The OGP Outdoor Help Point Tower was designed to provide reliable communications in environments subject to vandalism, moisture, dust and corrosive chemicals such as:

Universities Public Access Areas


Business Campuses Parks

Building Entrances Plant Entry Gates
Parking Facilities Amusement Parks
Sporting Facilities Senior Citizen Housing
Transit Authorities Medical Centers
Industrial Parks and more ...







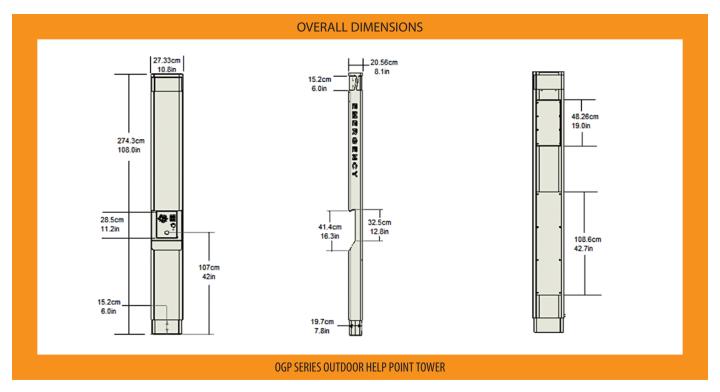

### **ENGINEERING SPECIFICATIONS**

#### **ELECTRICAL REQUIRMENTS**

Beacon/Lighting: 120/240VAC or 24VDC @ nAmps
If using SIP/IP Communications 24VDC@1A or POE 802.11aF\*
If using analog Communications Telephone line powered and/or +12VDC @ 0.5A\*\*

#### **MECHANICAL SPECIFICATIONS**

 Pole Material
 Cold Rolled Steel – 11 Gauge

 Pole Base Material
 316 Stainless Steel – 16 Gauge

 Weight:
 120lbs, 54.5Kg

 Overall Dimensions
 11"W x 8.1"D x 108"H

 Communication Panel Area
 11"W x 12.9"H

 Beacon Viewable Area
 6"H 152mm

 $\begin{tabular}{lll} Access Panels & Qty 2 - Lower (42") and Upper (19") \\ Integrated DIN Rail & STD 2" - 19" length \\ \end{tabular}$ 

#### PRODUCTS SUPPORTED

#### HDE SERIES ANALOG HEAVY DUTY EMERGENCY & PUBLIC ACCESS TELEPHONES

HDE-11 — Recessed/Single Emergency/ 0.3 Watt.\*\*

HDE-1100 — Recessed/Single Call Button & 12 Digit Keypad/ 0.3 Watt\*\*

#### **HDE-V SERIES VOIP HEAVY DUTY EMERGENCY & PUBLIC ACCESS TELEPHONES**

HDE-11-V — Recessed/Single Emergency/ 0.5 Watt

HDE-1100-V — Recessed/Single Call Button & 12 Digit Keypad/ 0.5 Watt

Industry Standard Insert Panels easily accepted.

# **ENVIRONMENTAL**

PoleIP-65 Weather proof ratingBase316 Stainless Steel.Painted surfacesPowder coat with dual coating, corrosion resistive primer.Exterior finishUV stabilized.Telecom Panels316 Stainless SteelElectronics:-40C to +70C

#### COMPLIANCE

CSA/UL 60950-1 – Safety Weather Rating IP-65 / Nema 4

ADA

Refer to insert datasheets for communications device compliance

## ORDERING INFORMATION

Order No. Description
Pxxxx OGP-10 9' Free Standing Tower

Options

OHCM Overhead Camera Mount HL Hearing Loop Antenna

External Antenna Required - Contact Guardian Telecom

Warranty: 3 year parts and labor

Distributed by:





GUARDIAN TELECOM, a division of CIRCA ENTERPRISES INC. Calgary, Alberta, Canada Telephone: 1 403 258-3100 Facsimile: 1 403 255-2595 Toll Free: 1 800 363 8010 (North America) info@guardiantelecom.com | www.guardiantelecom.com

<sup>\*</sup>Contact Guardian Telecom for IP power requirements based on options and configuration for IP Products.

<sup>\*\*</sup>Adding supplemental power to the analog communications products provides additional features and capabilities.